


UEMT6170Z



**ENGINEERING CODE**  
594RA5312AA

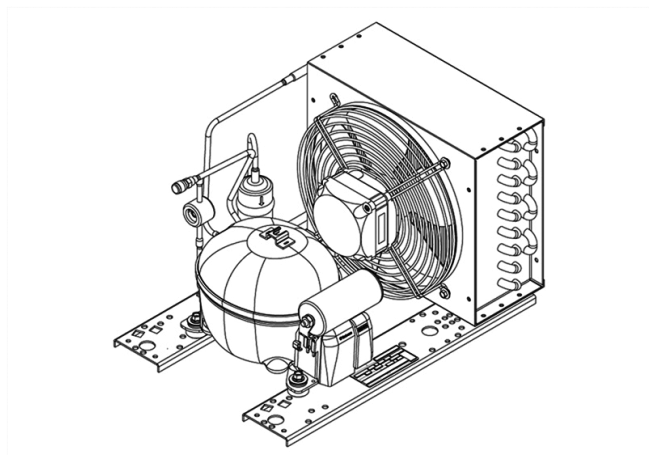

**REFRIGERANT**  
R-134a



**POWER SUPPLY**  
220-240 V 50 Hz



**APPLICATION**  
HBP



**MOTOR TYPE**  
CSIR



**STANDARD**  
EN13215\_RG20



**COOLING CAPACITY**  
433 W



**EFFICIENCY**  
1.66 W/W

CE

ECODESIGN COMPLIANT

DATA

GENERAL DATA

Model UEMT6170Z

CONDENSING COMPONENTS

|                    |               |         |
|--------------------|---------------|---------|
| Compressor         | EMT6170Z      | M/HBP   |
| Condenser          | 3R9T          | 2451205 |
| Refrigerant        | R-134a        |         |
| Expansion Device   | C-V           |         |
| Fan Blade Diameter | 230           |         |
| Fankit             | 10W 230/31/5B | 1996580 |

MECHANICAL DATA

|             |                       |
|-------------|-----------------------|
| Air Flow    | 420 m <sup>3</sup> /h |
| Height      | 254 mm                |
| Shaft Power | 10                    |
| Weight      | 15 Kg                 |
| Width       | 300 mm                |
| Length      | 435 mm                |

## PERFORMANCE

### TESTED CONDITIONS

|                    |              |
|--------------------|--------------|
| Tested Refrigerant | R-134a       |
| Tested Application | HBP          |
| Tested Standard    | EN13215_RG20 |

### RATED POINTS

| Ambient Temperature °C | Evaporating Temperature °C | Cooling Capacity W | Efficiency W/W | Consumo de Potencia W |
|------------------------|----------------------------|--------------------|----------------|-----------------------|
| 32                     | -10                        | 433                | 1.66           | 261                   |

Test Condition: Subcooling 3 K, Return Gas 20 °C.

### PERFORMANCE CURVE

Ambient Temperature 25°C

| Evaporating Temperature °C | Cooling Capacity W | Efficiency W/W | Consumo de Potencia W |
|----------------------------|--------------------|----------------|-----------------------|
| -15                        | 365                | 1.58           | 231                   |
| -5                         | 561                | 1.97           | 284                   |
| 0                          | 666                | 2.10           | 317                   |
| 5                          | 776                | 2.19           | 354                   |
| 10                         | 894                | 2.26           | 396                   |

Test Condition: Subcooling 3 K, Return Gas 20 °C.

### PERFORMANCE CURVE

Ambient Temperature 32°C

| Evaporating Temperature °C | Cooling Capacity W | Efficiency W/W | Consumo de Potencia W |
|----------------------------|--------------------|----------------|-----------------------|
| -15                        | 351                | 1.48           | 238                   |
| -5                         | 522                | 1.80           | 289                   |
| 0                          | 618                | 1.92           | 322                   |
| 5                          | 723                | 2.01           | 359                   |
| 10                         | 835                | 2.09           | 400                   |

Test Condition: Subcooling 3 K, Return Gas 20 °C.


### PERFORMANCE CURVE

Ambient Temperature 43°C


| Evaporating Temperature °C | Cooling Capacity W | Efficiency W/W | Consumo de Potencia W |
|----------------------------|--------------------|----------------|-----------------------|
| -15                        | 284                | 1.15           | 247                   |
| -5                         | 426                | 1.40           | 305                   |
| 0                          | 512                | 1.50           | 341                   |
| 5                          | 610                | 1.60           | 382                   |

Test Condition: Subcooling 3 K, Return Gas 20 °C.

## ENVELOPE

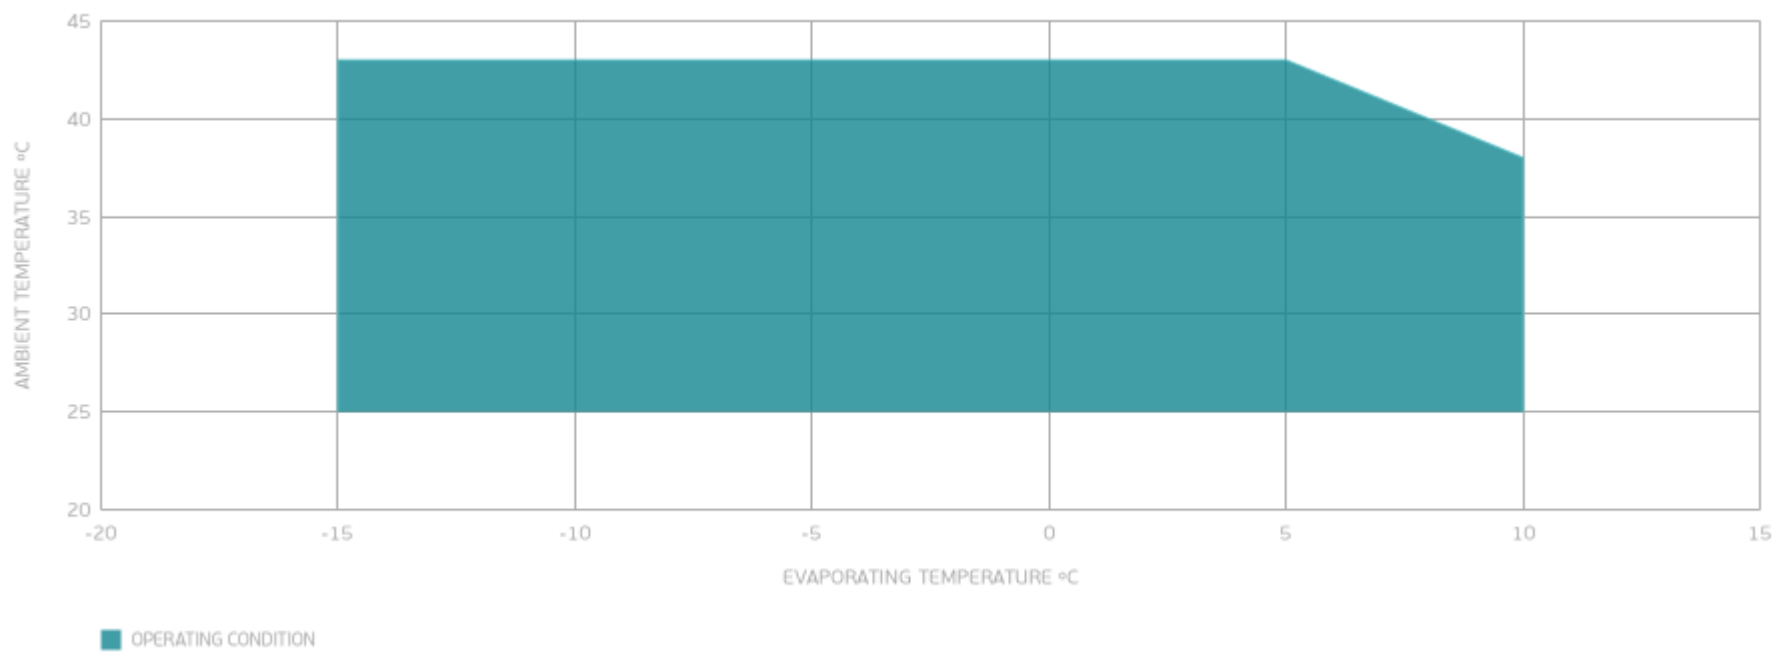

## EXTERNAL DIMENSIONS

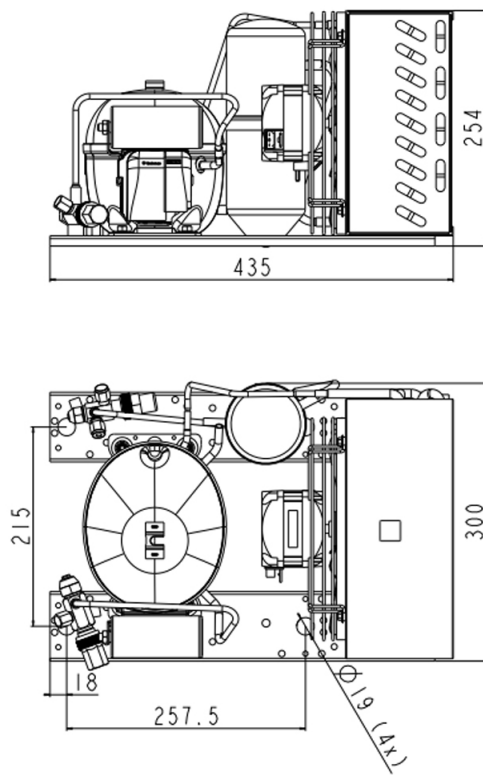

## WIRING DIAGRAM

