


EMU5125Y

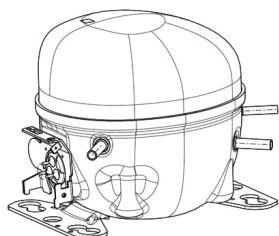

ENGINEERING CODE
513306234

REFRIGERANT
R-600a

POWER SUPPLY
220-240 V 50 Hz

APPLICATION
HBP

MOTOR TYPE
RSCR

STANDARD
EN12900

COOLING CAPACITY
236 W

EFFICIENCY
2.69 W/W



DATA

GENERAL DATA

Model	EMU5125Y
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	HBP
Expansion Device	Capillary Tube
Compressor Cooling	Static/220
HP	1/10
Starting Torque	LST
Plant	BRAZIL

ELECTRICAL DATA

Start Winding Resistance	32.65 Ω at 25°C
Run Winding Resistance	40.25 Ω at 25°C
Locked Rotor Amperage (LRA) 50Hz	3.7 A
Rated Load Amperage (LMBP) at 50 Hz	0.5 A
Rated Load Amperage (HBP) at 50 Hz	0.5 A

MECHANICAL DATA

Displacement	4.5 cm ³
Oil Charge	180 ml
Oil Type	ALQUILB
Oil Viscosity	ISO5
Weight	7.2 Kg

ELECTRICAL COMPONENTS

CSR CSIR BOX	No
Starting Device Type	PTC
Overload Protection	AE37FN

EXTERNAL CHARACTERISTICS

Base Plate	SMALL EUEM
Tray Holder	YES

Connector	Internal Diameter	Shape	Material
Suction	6.1 mm	SLANTED 42° UP + 45° TO BACK	COPPER
Discharge	4.94 mm	SLANTED PARALLET BP+24°TO BACK	COPPER
Process	6 mm	SLANTED 43° UP + 45° TO BACK	COPPER(OD)

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-600a
Tested Application	HBP
Tested Standard	EN12900
Tested Cooling	Static
Tested Voltage	220 V
Tested Frequency	50 Hz
Max Refrigerant Charge	150 g
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
50	5	236	2.69	88	-	3.22

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE**Condensing Temperature 35°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-15	124	2.11	59	-	1.45
-10	155	2.48	63	-	1.83
-5	192	2.88	67	-	2.27
0	235	3.38	69	-	2.78
5	283	4.02	70	-	3.37
10	338	4.92	69	-	4.04

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE**Condensing Temperature 45°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-15	107	1.68	64	-	1.38
-10	136	1.98	69	-	1.75
-5	170	2.28	74	-	2.19
0	208	2.62	79	-	2.69
5	252	3.03	83	-	3.28
10	302	3.54	85	-	3.94


Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE**Condensing Temperature 55°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	117	1.61	73	-	1.65
-5	147	1.86	79	-	2.08
0	181	2.13	85	-	2.59
5	221	2.42	91	-	3.16
10	265	2.76	96	-	3.83

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

ENVELOPE

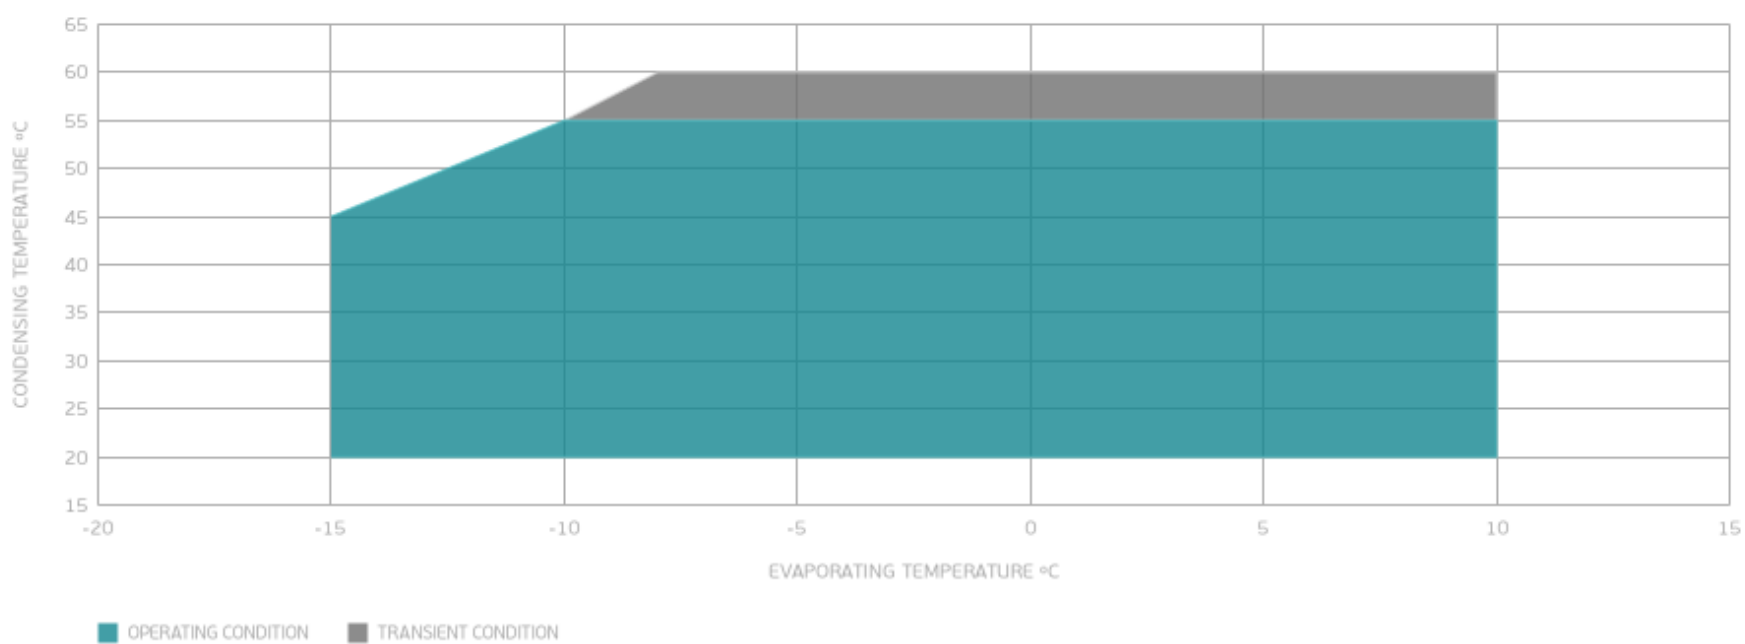

EXTERNAL DIMENSIONS

