# Portable air conditioners

Portable air conditioners are perfect for places where you need to relocate or where stationary air conditioning is not possible.

KPPH air conditioners with a cooling capacity of  $2.6\,\mathrm{kW}$  have cooling, dehumidification and condensate evaporation functions. It is the perfect solution for rooms with low heat loads, up to approx.  $20\,\mathrm{m}^2$ . The KPPD model with a cooling capacity of  $3.5\,\mathrm{kW}$  has an additional heating function and can also be used in larger rooms up to approx.  $30\,\mathrm{m}^2$ .

100



KPPD-12HRG29

# Kppc

Portable air conditioners are ideal where relocation is needed or where stationary air conditioning is not an option.

The KPPD air conditioner works in 4 basic operation modes: cooling, dehumidification, heating and ventilation. Control of the air conditioner is facilitated by the wireless remote control that comes as a standard.



112



## **Technical** specification

MODEL			KPPD-12HRG29
	cooling	kW	3,5
Capacity	heating	kW	2,9
Energy class	cooling/heating		A/A+
EER	average	W/W	2,6
COP	· · · · · · · · · · · · · · · · · · ·		2,8
D	cooling	W	1350
Power consumption	heating	W	1450
On another and the second of t	cooling	А	5,9
Operating current	heating	А	5
Air flow rate		m³/h	420/370/355
Operating temperature		°C	17÷35/5÷30
Sound pressure level		dB(A)	52/51/50
Net dimensions w/h/d		mm	467/765/397
Transport dimensions w/h/d		mm	512/880/442
Net weight		kg	33,2
Transport weight		kg	37
Electric power supply		V/Hz/Ph	220÷240/50/1
Refrigerant		<u> </u>	R290
The amount of refrigerant		kg	0,22
Moisture removal rate		l/h	3,4

### **Controllers**


WIRELESS REMOTE CONTROL




RG51

113

## PORTABLE **KPPH**



## PORTABLE **KPPD**




MODEL	DIMENSIONS [mm]  A B C				
	A	В	С		
KPPH-09HRG29	355	345	703		

MODEL	DIMENSIONS [mm]					
	A	В	C			
KPPD-12HRG29	467	397	765			

### 120

### DUCT **SLIM**

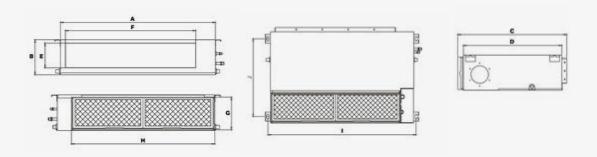

MODEL	DIMENSIONS [mm]									
	A	В	С	D	E	F	G	н	ı	J
KTI-18HWG32X	880	210	674	600	136	706	190	782	920	508
KTI-24HWG32X	1100	249	774	700	175	926	228	1001	1140	598
KTI-36 HWG32X	1360	249	774	700	175	1186	228	1261	1400	598
KTI-48HWG32X, KTI-55HWG32X	1200	300	874	800	227	1044	280	1101	1240	697