
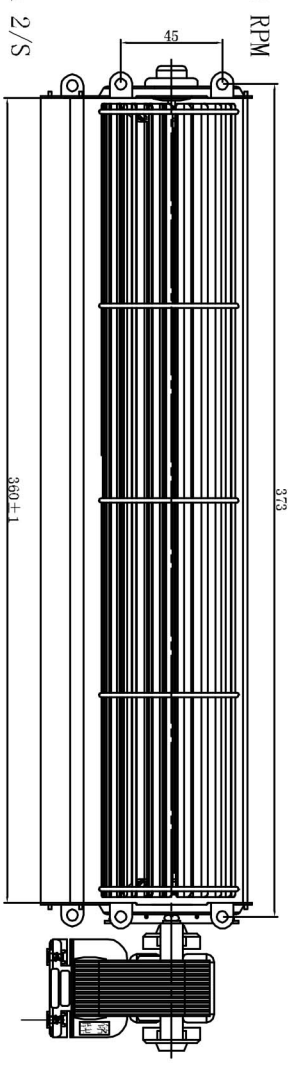
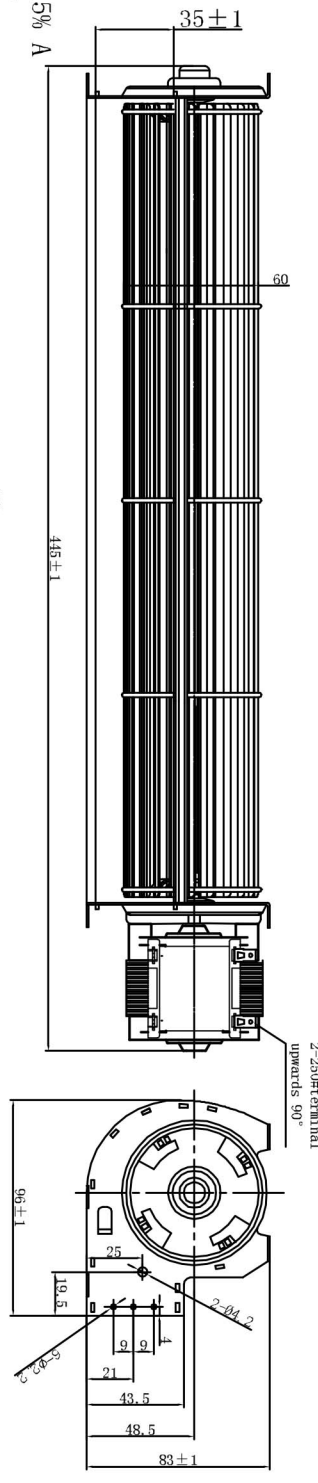


Label:

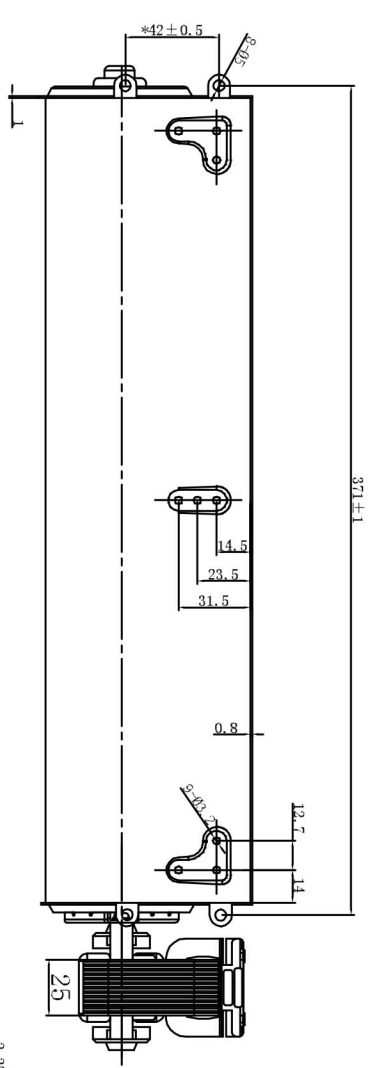

- Tech requirements:
1. Volt/Freq.: 230V/50Hz
  2. Insulation grade: B
  3. Direction: C, C, W
  4. Loading current:  $0.32 \pm 15\%$  A
  5. Loading power:  $30 \pm 15\%$  W
  6. Loading speed:  $1300 \pm 300$  RPM
  7. Rising temperature:  $254V/50Hz \leq 95K$
  8. Blocked temperature:  $230V/50Hz, \leq 175^{\circ}C$
  9. Noise:  $\leq 45dB$
  10. High volt test:
  11. Environment requirements: Motor can bear 1800V 1mA 2/S
- Fit "ROHS" REACH "requirements."

Loading:  $\phi 60 \times 360$  cross flow fan

尺寸范围		未注公差		图框		名称	
0.5-20	$\pm 0.05$	切削件 冲压件	熔铸件	A4	共1张	3张	外形图
20-30	$\pm 0.10$	0.5-20	$\pm 0.15$	mm	比例	1:1	型号
30-120	$\pm 0.20$	30-120	$\pm 0.30$	版本 (Version)		A	图号
120-100	$\pm 0.30$	120-100	$\pm 0.50$	批准日期			ZC.023.XXX
				审核日期			工程号
				设计/日期		王学锋 2019-01-24	E3287
				客户名称			K0190
				客户物料号			
版本		变更内容		变更人		日期	
1		2		3		4	
5		6		7		8	
9		10		11		12	