




## C28T Crankshaft-driven High Pressure Cleaning Machine

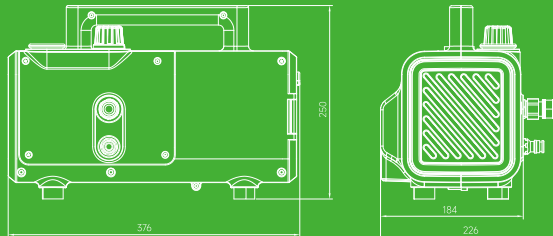

## C28T Crankshaft-driven High Pressure Cleaning Machine

Industrial Grade  
Reliable & Durable



Variable pressure (5-28bar) for optimal flexibility to meet the different occasions.



Crankshaft-driven pump with ceramic-coated pistons for long service life.



Large oil level sight glass, easily accessible to check oil status, and ready for oil change in time for maintenance.



### Product Description

C28T is a professional high-pressure equipment, special design for HVAC cleaning industry, it has a crankshaft-driven pump with ceramic-coated pistons for long service life, allowing it to work continuously.

With its adjustable working pressure from 5-28bar for optimal flexible cleaning, it is able to remove the most dirt from condenser & evaporator coils without damaging these sensitive fins.

Great portability. Its small size and light weight allow it to be carried in one hand.



Flow rate  
4.5 L/min



Adjustable pressure  
5-28bar



Automatic  
start and stop



Continuous operation  
4-6h

### Technical Data

Model	C28T
Voltage	230V~/50-60Hz or 100-120V/50-60Hz
Working Pressure	5-28bar(Adjustable)
Flow Rate(Max.)	4.5L/min
Output Power	3/4HP
Weight	8.5kg
Water Pipe	2m inlet hose, 7m outlet Hose

### Accessories

